



SPICER[®]
ELECTRIFIED

e-Drive Systems

Spicer[®] Electrified[™] e-Gearbox


3e2

Product Benefits

- High-speed reduction unit for compact construction equipment
- Allows the use of high-speed motors with standard Dana drivelines (1- or 2-speed)
- Compact and modular solution
- Speed range and performance in line with hydrostatic motor

Product Features

- Maximum output speed: 3600 RPM
- Peak output torque: 1400 Nm
- Peak output power: 100 kW
- Continuous output power: 100 kW
- DC voltage range (V): 300 to 750 V
- Maximum continuous current (A): 350 A

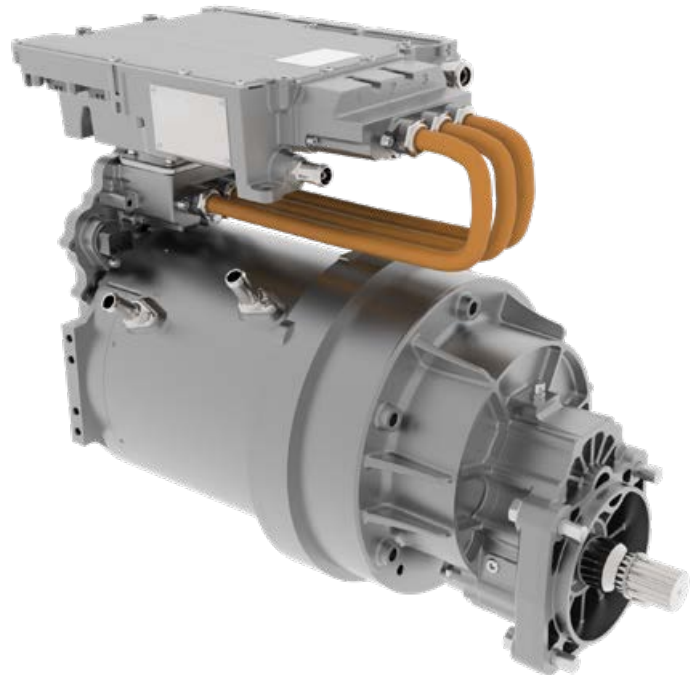

Ideal for Construction Vehicles

